





CSN® HEATING WIRE TYPE HDGK, WITH GLASS SILK INSULATION

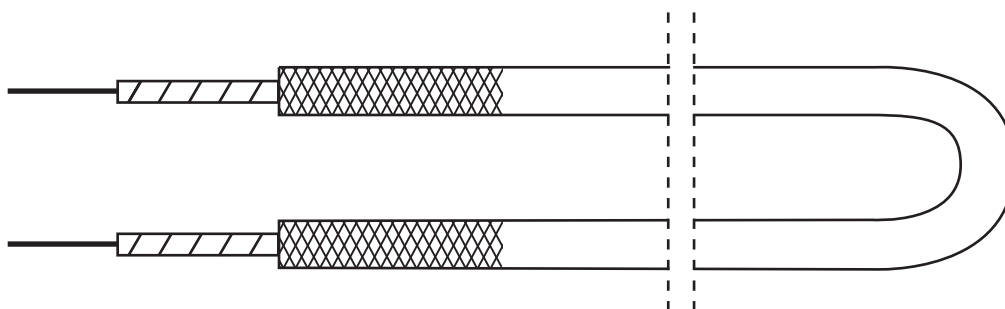

Standard version:

“Constantan” heat conductor wire
with 4 glass silk wrappings
with 1 glass silk braiding
Lacquer impregnation
Colour marking: white
Temperature resistance 250 °C
Nominal voltage 230 V Ws



Installation:

The heating wire can be connected to lustre terminals or binding posts.

Type	Length m	Outer diameter mm	Wire diameter mm	Capacity Watt	Voltage Volt
HDGk	38	3,0	0,50	0,50	230
HDGk	49	3,2	0,70	0,70	230
HDGk	55	3,2	0,85	0,85	230
HDGk	73	3,7	1,20	1,20	230
HDGk	75	3,9	1,40	1,40	230
HDGk	88	4,2	1,70	1,70	230
HDGk	92	4,4	1,90	1,90	230

Specialist contact person:

Andreas Nottelmann

Phone: +49 2392 - 692 - 35
Fax: +49 2392 - 692 - 8935
eMail: andreas.nottelmann@schniewindt.de

Dominik Naumann

Phone: +49 2392 - 692 - 61
Fax: +49 2392 - 692 - 8961
eMail: dominik.naumann@schniewindt.de